

NEW

Type AS-CS-T and AS-CS-TM

Crane scales up to 6,000 kg, available as CE-M approved or for internal use

✓ Features:

- Approvable crane scales, also available as verified (conformity assessed) scales for legal-for-trade applications
- Robust housing made of die-cast aluminium
- Upper fixed shackle
- Lower fixed hook with safety catch
- High-performance rechargeable battery
- Standard remote control (maximum distance 20 m)

✓ Technical data:

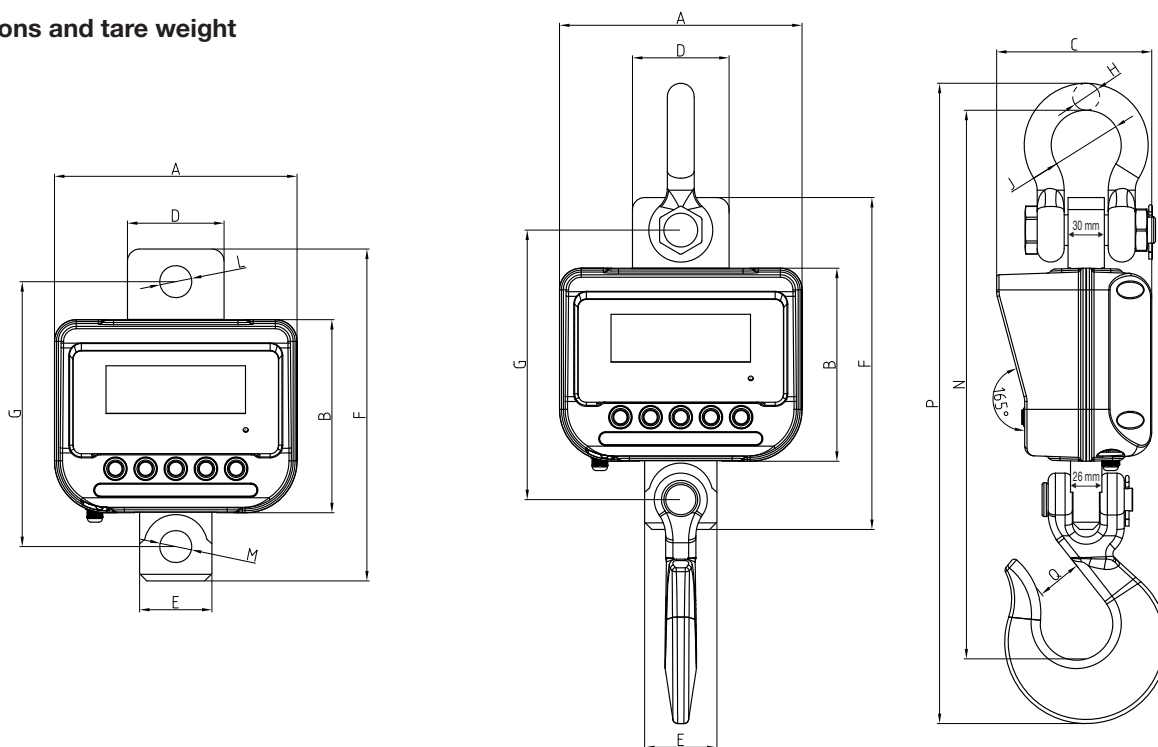
- 30 mm high, backlit LCD display
- Front keypad with five buttons
- Accuracy: $\pm 0.05\%$ of the weighing range (of end value)
- Zeroing up to 4% of end value
- Tare up to 100% of end value
- Gross/net
- Battery status display
- Overload warning
- Automatic switch-off
- Energy-saving mode
- Battery 7.4 V / 5.2 Ah
- Battery capacity: up to 70 hours
- Permissible temperature range: -10 to $+40^{\circ}\text{C}$

✓ On request:

- LED display and Bluetooth or Wi-Fi interface
- Lower shackle and rotatable hook



Code	Weighing range (kg)	Readability (kg)	Verification scale interval (kg)
AS-CS-T1.5 NEW	1,500	0.5	-
AS-CS-TM1.5		0.5	0.5
AS-CS-T3 NEW	3,000	1	-
AS-CS-TM3		1	1
AS-CS-T6 NEW	6,000	2	-
AS-CS-TM6		2	2

Dimensions and tare weight

Code	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	L/M (mm)	N (mm)	P (mm)	Q (mm)	Tare weight (kg)
AS-CS-T/TM1.5	201	160	128.5	80	60	270	219	Ø19	Ø50.8	Ø23	415	477	42.9	9
AS-CS-T/TM3	201	160	128.5	80	60	275	219.5	Ø22	Ø58	Ø26.5	456	532	50.8	10
AS-CS-T/TM6	201	160	128.5	95	80	320	248	Ø25.4	Ø68.3	Ø30	528	624	63.5	15